
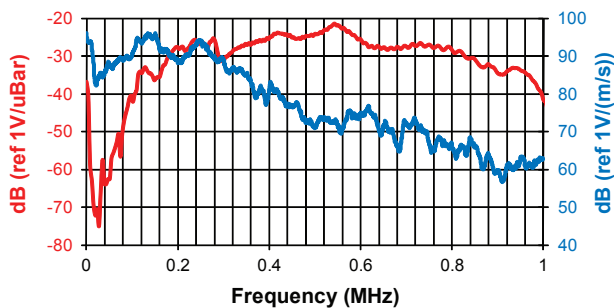



WDI-AST Sensor

Integral Preamplifier Sensor



DESCRIPTION AND FEATURES

MISTRAS' integral preamp sensors were specifically engineered to attain high sensitivity and have the capability to drive long cables without the need for a separate preamplifier. Incorporating a low-noise input, 40 dB preamplifier and a filter all inside the sensor housing, these transducers are completely enclosed in metal stainless steel (or aluminum) housings that are treated to minimize RFI/EMI interference. Care has also been taken to thermally isolate the critical input stage of the preamplifier in order to provide excellent temperature stability over the range of -35° to 75° C.

Their integrated Auto Sensor Test (AST*) capability allows these sensors to pulse as well as receive. This feature lets you verify the sensor coupling and performance at any time throughout the test.

APPLICATIONS

Wideband sensors are typically used in research applications and other applications where a high fidelity AE response is required. In research applications, wideband AE sensors are useful where frequency analysis of the AE signal is required and to help determine the predominant frequency band of AE sources for noise discrimination and selection of a suitable lower cost, general purpose AE sensor. In high fidelity applications, wideband sensors can detect various AE wavemodes to provide more information about the AE source and distance of the AE event.

OPERATING SPECIFICATIONS

Dynamic

Peak Sensitivity, Ref V/(m/s).....	96 dB
Peak Sensitivity, Ref V/μbar.....	-25 dB
Operating Frequency Range.....	200-900 kHz
Directionality.....	+/-1.5 dB

Environmental

Temperature Range.....	-35 to 75°C
Shock Limit.....	500 g
Completely enclosed crystal for RFI/EMI immunity	

Physical

Dimensions.....	1.13"OD X 1.16"H
	29 mm OD X 30 mm H
Weight.....	70 grams
Case Material.....	Stainless Steel (304)
Face Material.....	Ceramic
Connector.....	BNC
Connector Locations.....	Side

Electrical

Gain.....	40 dB
Power Requirements.....	20-30 VDC @ 25 mA
Dynamic Range.....	> 87 dB
Noise Level (RMS RTI).....	< 3 μV
Output Drive Impedance.....	50 Ω
Grounding.....	Case Grounding,
	 Isolated from mounting surface

ORDERING INFORMATION AND ACCESSORIES

WDI-AST.....	WDI-AST
Cable (specify length in 'XX' m at end of PN).....	1234 - X
Magnetic Hold-Down.....	MHR6I
Amplifier Subsystems.....	AE2A, AE5A

Sensors include

NIST Calibration Certificate & Warranty

