


ISR3CA-HT Sensor

Intrinsically Safe High Temperature Sensor




DESCRIPTION AND FEATURES

The ISR3CA-HT sensor is a low frequency, resonant, acoustic emission sensor with an integral cable. It is designed to meet the intrinsic safety (IS) and IP66 sealing requirements and can operate continuously at very high temperatures. The special polymer coatings on the sensor along with an integral cable make it 100% insulated and non-conductive. The sensor can be used to temperatures of 150 C.

APPLICATIONS

The sensor can be readily used for leak detection or structural health monitoring in harsh environments requiring intrinsic safety. It can be used for the monitoring of structures like pipelines, pressure vessels and storage tanks in petroleum refineries, chemical plants and offshore platforms.

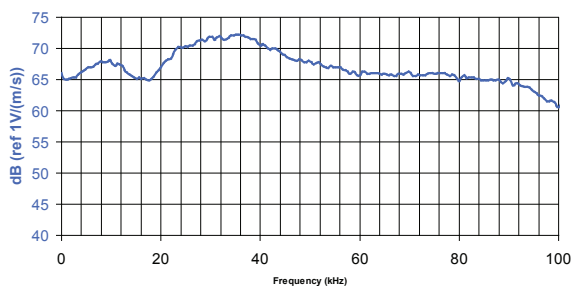

OPERATING SPECIFICATIONS

Dynamic

Peak Sensitivity, Ref V/(m/s)..... 72 dB
 Operating Frequency Range 10-100 kHz
 Resonant Frequency, Ref V/(m/s).....30 kHz
 Directionality..... +/-1.5 dB

Environmental

Temperature Range -40 to 150°C
 Shock Limit500 g
 Waterproof..... IP66
 Completely enclosed crystal for RFI/EMI immunity

Physical

Dimensions..... 1.30"OD X 1.75"H
 33 mm OD X 44.45 mm H
 Weight50 grams with 1 meter cable
 Case Material..... Stainless Steel/Epoxy
 Face Material..... Ceramic
 Connector BNC on integral cable
 Connector Locations.....Side

Certifications

II 1 (1) GD, Ex ia IIC T3

ORDERING INFORMATION AND ACCESSORIES

ISR3CA-HT..... ISR3CA-HT
 Cable (specify length in 'XX' m) XX
 IS Zener Barrier/Preamplifier Interface 1281

Sensors include

NIST Calibration Certificate & Warranty

